

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
24 October 2002 (24.10.2002)


PCT

(10) International Publication Number
WO 02/085055 A3

- (51) International Patent Classification⁷: **H04Q 7/24**,
H04L 12/56, 12/28 [US/US]; 21433 SE 33rd Place, Sammamish, WA 98075 (US).
- (21) International Application Number: PCT/US02/12181 (74) Agent: RINEHART, Kyle, B.; Klarquist Sparkman, LLP,
One World Trade Center, Suite 1600, 121 SW Salmon
Street, Portland, OR 97204 (US).
- (22) International Filing Date: 16 April 2002 (16.04.2002)
- (25) Filing Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data:
60/284,358 17 April 2001 (17.04.2001) US
10/091,047 4 March 2002 (04.03.2002) US
- (71) Applicant (*for all designated States except US*): AT & T
WIRELESS SERVICES, INC. [US/US]; 7277 164th Av-
enue N.E., Redmond, WA 98052 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): SHIEH, Hugh, H. (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: BINDING INFORMATION FOR IP MEDIA FLOWS

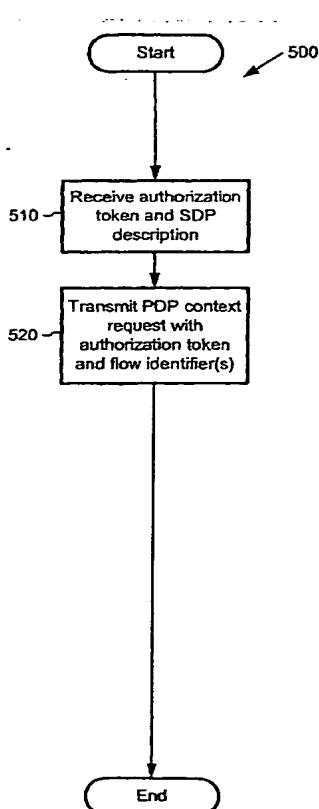

(57) Abstract: A binding mechanism uses an authorization token and packet media flow identifier(s) to identify packet media flow(s) of a session for authorization. This provides the advantages of using a per-session authorization token while also allowing resource authorization and allocation on the basis of individual packet media flows of the session. The binding mechanism includes various aspects.



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

(88) Date of publication of the international search report:
6 February 2003

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 02/12181

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/24 H04L12/56 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

A	WO 00 10357 A (NOKIA NETWORKS OY ;HAUMONT SERGE (FI); NIEMELAE TUOMAS (FI); PUUSK) 24 February 2000 (2000-02-24) page 10, line 22 - line 30 page 13, line 15 - line 16 page 18, line 25 -page 19, line 15; figure 3	1-28
---	---	------

A	WO 99 05828 A (ERICSSON TELEFON AB L M) 4 February 1999 (1999-02-04) abstract page 7, line 8 -page 8, line 23 page 12, line 23 -page 13, line 17 page 18, line 1 - line 2- <div style="text-align: center;">-/--</div>	1-28
---	--	------

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

22 October 2002

Date of mailing of the international search report

04/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Mannekens, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/12181

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SINNREICH H ET AL: "INTERDOMAIN IP COMMUNICATIONS WITH QOS, AUTHORIZATION AND USAGE REPORTING" INTERNET DRAFT, XX, XX, February 2000 (2000-02), pages 1-67, XP002939495 the whole document	1-28
A	MARSHALL ET AL: "SIP Extensions for Media Authorization" INTERNET DRAFT, 'Online! February 2001 (2001-02), XP002217605 Retrieved from the Internet: <URL:http://www.watersprings.org/pub/id/draft-ietf-sip-call-auth-01.txt> 'retrieved on 2002-10-22! cited in the application the whole document	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/12181

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0010357	A	24-02-2000	FI 981722 A	11-02-2000
			AU 5291899 A	06-03-2000
			BR 9912911 A	08-05-2001
			CA 2339825 A1	24-02-2000
			CN 1317217 T	10-10-2001
			EP 1104639 A1	06-06-2001
			WO 0010357 A1	24-02-2000
			JP 2002523938 T	30-07-2002
WO 9905828	A	04-02-1999	AU 739717 B2	18-10-2001
			AU 8369898 A	16-02-1999
			BR 9810796 A	25-07-2000
			CN 1271488 T	25-10-2000
			EP 0997018 A1	03-05-2000
			NZ 502339 A	30-11-2001
			WO 9905828 A1	04-02-1999

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number
WO 02/085055 A2

(51) International Patent Classification⁷: **H04Q 7/24**

[US/US]: 21433 SE 33rd Place, Sammamish, WA 98075 (US).

(21) International Application Number: PCT/US02/12181

(22) International Filing Date: 16 April 2002 (16.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/284,358 17 April 2001 (17.04.2001) US
10/091,047 4 March 2002 (04.03.2002) US

(71) Applicant (for all designated States except US): **AT & T WIRELESS SERVICES, INC.** [US/US]; 7277 164th Avenue N.E., Redmond, WA 98052 (US).


(74) Agent: **RINEHART, Kyle, B.**; Klarquist Sparkman, LLP, One World Trade Center, Suite 1600, 121 SW Salmon Street, Portland, OR 97204 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: **BINDING INFORMATION FOR IP MEDIA FLOWS**

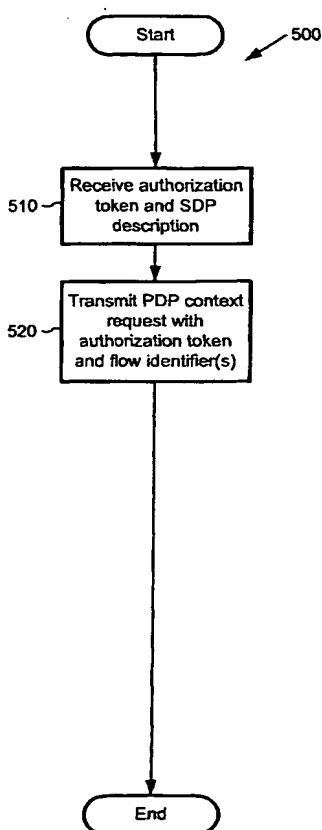

(57) Abstract: A binding mechanism uses an authorization token and packet media flow identifier(s) to identify packet media flow(s) of a session for authorization. This provides the advantages of using a per-session authorization token while also allowing resource authorization and allocation on the basis of individual packet media flows of the session. The binding mechanism includes various aspects.

WO 02/085055 A2



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

BINDING INFORMATION FOR IP MEDIA FLOWS

RELATED APPLICATION INFORMATION

The present application claims the benefit of U.S. Provisional Patent
5 Application Serial No. 60/284,358, entitled "Binding Information for IP Media Flows,"
filed April 17, 2001, the disclosure of which is incorporated by reference.

TECHNICAL FIELD

The present invention relates to a binding mechanism for packet media
10 flows. In one embodiment, the binding mechanism uses an authorization token and
one or more flow identifiers to identify one or more media flows of a session for
authorization.

BACKGROUND

15 In the last ten years, the number of cellular devices used by the public has
exploded. Mobile telephones are commonplace, and personal digital assistants
["PDAs"] and laptop computers with wireless capability are increasingly popular.
Cellular devices are used for browsing the World Wide Web, one-way and two-way
audio and video communication, instant messaging, and transmitting and receiving
20 other types of multimedia information as well.

Over the same period, the Internet has grown tremendously. In the early
1990's, the Internet was typically used for email, text communication, or file
transfer. Today, the Internet is still used for these purposes, but it is also used for
one-way audio and video streaming, two-way audio and video communication,
25 multimedia browsing, and messaging.

The Internet is an example of a packet-switched network. Whatever kind of
information is sent over the Internet, the information is transmitted in packets. In
general, a packet has 1) a header with addresses of the sender and destination for
the packet and 2) a data payload portion with a chunk of the information. Packets
30 are routed from computer to computer within the Internet to get from the sender to
the destination. Internet Protocol ["IP"] is a set of rules for transmitting packets over
the Internet. Various versions of IP have been developed, as have other packet
data protocols.

The Internet offers several advantages as a telecommunications network. It spans the globe and includes redundancy to compensate for equipment failure. It operates with a variety of different types of networks and end user equipment.

On the other hand, several traits of the Internet make it unsuitable for certain applications. Conventionally, delivery of packets over the Internet happens according to a best effort model. A routing computer (i.e., router) routes packets as best it can, but sometimes gets overwhelmed with the amount of traffic. At such times, delivery of packets can be delayed or packets can get dropped. For applications such as email this is not really a problem, because delivery time is not critical and packets can be re-transmitted. For other applications, however, delay and discontinuity are more problematic. Audio telephony and videoconferencing have limits on the amount of delay that is acceptable for communication. Audio and video streaming have less stringent limits, but also can suffer from delay and discontinuity. The best effort model of the Internet hinders the development of audio, video, and other IP multimedia applications that have higher quality of service ["QoS"] requirements. In addition, Internet users are typically charged a flat access fee unrelated to how many packets the user transmits or receives over the Internet. People using the Internet for email can thus be charged disproportionately compared to people using the Internet for IP multimedia applications. Moreover, people who would pay more for higher QoS do not have that option.

Some recent developments have focused on how to take advantage of the good features of the Internet while addressing the traits that make it unsuitable for applications with higher QoS requirements. Other developments have focused on QoS in mobile telecommunications networks and end-to-end QoS for devices that communicate across both mobile telecommunications and packet-switched networks.

I. Session Initiation and Description Protocols

Session Initiation Protocol ["SIP"] is a set of rules for creating, modifying and terminating sessions with one or more participants. These sessions include Internet multimedia conferences, Internet telephone calls and multimedia distribution. SIP is mainly used for signaling information about sessions, and operates on top of lower-level protocols that control things such as routing of packets.

A SIP message can carry a session description, for example, according to Session Description Protocol ["SDP"], which allows participants to agree about the media flows for the session. A SDP description includes a session-level description (with details that apply to the session and the media streams) and zero or more
5 media-level descriptions (with details that apply to a single media stream). The session-level description includes information like session name (identified by a line beginning with "s=" in the SDP description), and can also include connection information ("c="), bandwidth information ("b="), and other information. A media-level description ("m=") includes information such as media type (e.g., video,
10 audio), transport protocol, and format (e.g., MPEG video). A media-level description can also include connection information, bandwidth information, and other information.

SIP supports user mobility by proxying and redirecting requests to the user's current location. For example, a user can register his current location with a SIP
15 proxy, which acts as an intermediary for the user for SIP signalling.

SIP has been extended to support call authorization using user agents ["UAs"] and SIP proxies. UAs (e.g., cellular devices of users) are considered untrusted. For a UA-initiated call, a SIP proxy authorizes media data to/from the UA. The SIP proxy supplies a media authorization token to the UA. When the UA
20 is ready to exchange a media data with another endpoint, the UA requests bandwidth using the media authorization token it received from its SIP proxy.

For more information about SIP and SDP, see Request for Comment ["RFC"] 2543 and RFC 2327 from the Internet Engineering Task Force ["IETF"]. For the SIP extension described above, see the IETF Internet Draft entitled "SIP
25 Extensions for Media Authorization," version 1.

II. Next Generation Internet Architectures

To address concerns with QoS over the Internet, various architectures have been researched which change the traditional best effort model of the Internet.
30 These next generation architectures include the Integrated Services in the Internet Architecture ["IntServ"] and the Architecture for Differentiated Services ["DiffServ"].

IntServ defines a set of extensions to the traditional best effort model of the Internet. In the IntServ architecture, a setup mechanism is used to convey information to routers so that the routers can provide requested services to flows
35 that require the services. Resource Reservation Protocol ["RSVP"] is one setup

mechanism. With RSVP, a host requests a specific QoS from the network for a particular data flow. The network responds by admitting or rejecting the request. For admitted requests, the appropriate routers are configured to provide the QoS. For additional information about IntServ and RSVP, see RFC 1633, RFC 2205, and
5 related specifications.

In the DiffServ architecture, packets are classified into one of multiple aggregated flows or "classes." A packet header includes a DiffServ codepoint ["DSCP"] indicating the class of the packet. A network node at the edge of the DiffServ network (i.e., a DiffServ edge node) can place an appropriate DSCP in the
10 packet header. Based on the DSCP, a DiffServ router can apply different packet forwarding treatment to the packet for the next hop in the DiffServ network. For additional information about DiffServ, see RFC 2474, RFC 2475, and related specifications.

To address concerns about charging for Internet usage, various
15 authorization and charging architectures have been explored. Different architectures charge by Internet usage (e.g., traffic and/or connection time), mobile telecommunications network usage, session or media flow. In various applications, charging by session and flow offers the advantages of simplicity to the end user and flexibility in pricing packages for different networks. For additional information, see
20 the relevant specifications by the IETF and the 3rd Generation Partnership Project ["3GPP"].

III. End-to-End QoS

When information flows over the Internet between two cellular devices, end-
25 to-end QoS can depend on the Internet QoS as well as the QoS for the mobile telecommunications networks (e.g., Global System for Mobile Communication ["GSM"] or Universal Mobile Telecommunications System ["UMTS"] network) between the Internet and the cellular devices.

The 3GPP has organized numerous specifications relating to mobile
30 telecommunications networks QoS and end-to-end QoS. 3rd Generation Technical Specification ["3G TS"] 23.060 v3.6.0 describes packet services that use a Packet Data Protocol ["PDP"] like IP over a mobile telecommunications network. 3G TS 23.107 v4.0.0 describes a QoS framework for UMTS networks. 3G TS 23.207 v1.2.0 describes a framework for end-to-end QoS and addresses how to map QoS
35 requirements between different networks.

A. Bearer Services

In general, to realize a certain QoS over a network, a bearer service ["BS," "bearer," or "service"] with defined characteristics and functionality is set up from the source to the destination of the service over the network. A bearer service includes aspects that enable the provision of a contracted QoS, for example, control signalling, user plane transport, and QoS management functionality. Figure 1 shows a bearer service layered architecture (100) according to the prior art. A bearer service on a specific layer uses services provided by the layers below and offers services to the layers above. Other architectures lack one or more of the services shown in Figure 1, use a different configuration of services, or use different services. For additional information about Figure 1 and the services and components referenced therein, see 3G TS 23.207 v1.2.0, 3G TS 23.107 v4.0.0, and related specifications.

B. Example Network Architecture

Figure 2 shows a simplified example of a network architecture (200) according to the prior art. Other network architectures are possible. The architecture (200) includes a UMTS network using a general packet radio service ["GPRS"] and a backbone IP network (240) (e.g., the Internet).

In Figure 2, the local user equipment ["UE"] (210) is, for example, a cellular device such as a mobile telephone or computer with wireless transmission capability. The serving GPRS support node ["SGSN"] (220) and the gateway GPRS support node ["GGSN"] (230) contain functionality to support GPRS for mobile telecommunications networks, and can be in the same or different network nodes. The SGSN (220) communicates, for example, by wireline channel with a base station that in turn communicates by radio transmission with the UE (210). The GGSN (230) routes packets (e.g., providing DiffServ Edge, IntServ/RSVP signaling, or other functions) between the UMTS network and the backbone IP network (240).

The IP Bearer Layer (270) includes an IP Bearer Service (272) for providing a contracted QoS from the UE (210) to the remote host (260), spanning the UMTS network and the backbone IP network (240). The Access Bearer Layer (280) includes bearer services underneath the IP Bearer Layer (270), for example, a UMTS Bearer Service for providing a contracted QoS between the UE (210) and

the GGSN (230). Figure 2 abstracts away the details of the remote access point (250) and access bearer service between the backbone IP network (240) and the remote host (260), which can mirror the UE (210) side or be different.

The UE (210) has one or more PDP (e.g., IP) addresses, which can be statically or dynamically assigned. One or more PDP contexts are set up across the PDP context bearer (e.g., the GPRS over the UMTS network). For example, with a PDP Context Activation request, the UE (210) requests a packet service with a specified QoS for a PDP address from a Access Point Name ["APN"]. The APN refers to an external packet data network and/or a service, and can be used in mapping the request to a GGSN. The requested QoS can be specified with a QoS profile.

A QoS profile is a set of attributes specifying the service for a network such as a UMTS network. 3G TS 23.107 v4.0.0 describes four different UMTS QoS traffic classes, which differ mainly in how delay sensitive the traffic is. In addition to traffic class, a user of the bearer can specify other attributes for the service provided by the network, including maximum bitrate, guaranteed bitrate, and transfer delay.

Class	Intended Use
conversational	Very delay-sensitive traffic such as audio and video telephony.
streaming	Non-conversational traffic, which are less delay-sensitive than audio and video telephony.
interactive	Interactive applications like WWW browsing and instant messaging.
background	Delay-insensitive traffic such as background file or email downloading.

Table 1: UMTS QoS traffic classes in TS 23.107 v4.0.0

The SGSN (220) and the GGSN (230) can modify the requested QoS according to a subscriber profile, current resources, or other criteria. The UE (210) can request additional PDP contexts at the same or different QoS over the PDP context bearer. The UE (210) can also modify certain attributes of existing PDP contexts (e.g., with a PDP Context Modification request). In some circumstances, the GGSN or other network entities can activate or modify contexts.

For additional information about Figure 2, the service and components referenced therein, other network architectures, PDP, QoS profiles, and QoS for UMTS networks, see 3G TS 23.207 v1.2.0, 3G TS 23.107 v4.0.0, 3G TS 23.060 v3.6.0, and related specifications.

C. Policy Enforcement and QoS Inter-Working

Figure 3 shows a framework (300) with QoS management functions for end-to-end IP QoS according to the prior art. At a high level, Figure 3 shows UE (310), a UTRAN (320) such as a network of cellular base stations, a CN EDGE (330) such as a SGSN, a gateway (340) such as a GGSN, a proxy - call session control function ["P-CSCF"] (350), and an external network (360). For the sake of simplicity, Figure 3 does not show lower layer bearer service functions.

In Figure 3, the gateway (340) includes an IP BS manager (342), a translation (346) function, and a UMTS BS manager (348). The IP BS manager (342) manages the inter-working with the external network (360), using mechanisms such as DiffServ Edge, RSVP/IntServ signaling, policy control, or service agreement functions. The IP BS manager (342) communicates with the UMTS BS manager (348) through the translation (346) function, which provides the inter-working between the mechanisms and parameters (e.g., QoS parameters) of the UMTS bearer service and those of the IP bearer service. Other frameworks are possible, for example, those including an IP BS manager and translation function in the UE (310), or those using other mechanisms for inter-working between networks.

The framework (300) can be used for policy-based admission control, in which a policy control function ["PCF"] (353) makes decisions in regard to network-based IP policy using policy information and rules. Policy information elements include, for example, addresses and authorized QoS for the IP flows of a session. The PCF (353) communicates policy information to the IP BS manager (342) in the gateway (340) across an interface. For IP Multimedia and other services, service-based local policy ["SBLP"] decisions can be applied to a bearer. SBLP decisions involve interaction between the UE(310), the gateway (340), and the P-CSCF (350).

In addition to the PCF (353), the P-CSCF (350) includes a local SIP proxy (351), which is used for SIP signaling and obtaining a SDP description of a session. The P-CSCF (350) and PCF(353) have several roles, including authorizing QoS resources for the session described in the SDP description. The P-CSCF (350)/PCF (353) can generate an authorization token for a SIP session and send the authorization token to the UE (310) by SIP message. The authorization token, for example, conforms to the IETF specification on SIP Extensions for Media Authorization.

The UE (310) makes resource reservation requests that the gateway (340) matches with authorizations from the PCF (353). For example, the UE (310)

includes the authorization token in PDP Context Activation or Modification requests along with UMTS QoS parameters. The authorization token can then be used to correlate the requests with the authorizations from the PCF (353).

The gateway (340) is the IP policy enforcement point and has several roles.
5 It controls access to QoS for flow(s) of IP packets. Policy information is either "pushed" to the gateway (340) by the PCF (353) or requested from the PCF (353) by the gateway (340). The gateway (340) also provides flow control/gating functionality, and takes action when the IP packets for a flow exceed authorization.

For additional information about Figure 3 and the service and components
10 referenced therein, see 3G TS 23.207 v1.2.0 and related specifications.

In general, per-flow authorization gives finer control over authorization, QoS management, and charging than per-session authorization, which in turn has advantages compared to network-level authorization alone. The authorization token generated during SIP signaling, however, is inadequate for individually
15 identifying multiple different flows of a session for authorization.

SUMMARY

The present invention relates to a binding mechanism for packet media flows. The binding mechanism uses an authorization token and packet media flow
20 identifiers to identify packet media flows of a session for authorization. This provides the advantages of using a per-session authorization token while also allowing resource authorization and allocation on the basis of individual packet media flows of the session. The binding mechanism includes various aspects.

According to a first aspect, an apparatus transmits one or more messages
25 including binding information for authorizing one or more packet media flows of a session. The binding information includes an authorization token that, when combined with a packet media flow identifier, is sufficient to identify a packet media flow of the session. For example, a UE transmits one or more PDP context requests including binding information. The binding information includes a SIP
30 media authorization token and one or more IP media flow identifiers.

According to a second aspect, a network node processes binding information for authorizing one or more packet media flows of a session. The binding information includes an authorization token. The network node interprets each of one or more packet media flow identifiers relative to the authorization token

to identify a packet media flow of the session. For example, binding information includes a SIP media authorization token and one or more IP media flow identifiers.

Additional features and advantages of the invention will be made apparent from the following detailed description of described embodiments that proceeds
5 with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram of a bearer service layered architecture according to the prior art.

10 Figure 2 is a diagram of a simplified example of a network architecture according to the prior art.

Figure 3 is a diagram illustrating QoS management functions for end-to-end IP QoS according to the prior art.

Figure 4 is a block diagram of a suitable computing environment in which
15 described embodiments may be implemented.

Figures 5 and 6 are flowcharts of techniques for a binding mechanism using an authorization token and IP media flow identifier(s).

DETAILED DESCRIPTION

20 Described embodiments of the present invention are directed to a binding mechanism for authorizing QoS requested for one or more IP media flows of a session. Binding information transmitted from UE to a GGSN includes a SIP media authorization token. The GGSN interprets one or more IP media flow identifiers relative to the SIP media authorization token to identify the one or more IP media
25 flows of the session. In terms of transmission bandwidth, computational complexity, and signaling complexity, using a per-session authorization token is more efficient than using a different authorization token per IP media flow of the session. At the same time, using multiple IP media flow identifiers in conjunction with the per-session authorization token provides a simple mechanism for resource
30 authorization and allocation on the basis of individual IP media flows of the session.

In the described embodiments, the binding mechanism includes several techniques and systems. While the techniques and systems are typically described herein as part of a single, integrated framework, the techniques and systems can be applied separately, potentially in combination with other techniques and
35 systems.

In the described embodiments, the binding mechanism is part of a system that complies with a variety of technical specifications, including most notably 3G TS 23.207, but also including 3G TS 23.107, 3G TS 23.060, and the IETF Internet Draft entitled "SIP Extensions for Media Authorization." In alternative embodiments,

5 the binding mechanism works in other systems and/or with other protocols.

Table 2 lists some acronyms and abbreviations used in the present application.

Short Form	Full Term
3G TS	3 rd Generation Technical Specification
3GPP	3 rd Generation Partnership Project
APN	Access Point Name
BS	Bearer Service
DiffServ	Architecture for Differentiated Services
DSCP	DiffServ Codepoint
GGSN	Gateway GPRS Support Node
GPRS	General Packet Radio Service
GSM	Global System for Mobile Communication
IETF	Internet Engineering Task Force
IntServ	Integrated Services in the Internet Architecture
IP	Internet Protocol
P-CSCF	Proxy - Call Session Control Function
PCF	Policy Control Function
PDA	Personal Digital Assistant
PDP	Packet Data Protocol
QoS	Quality of Service
RFC	Request for Comment
RSVP	Resource Reservation Protocol
SBLP	Service-based Local Policy
SDP	Session Description Protocol
SGSN	Serving GPRS Support Node
SIP	Session Initiation Protocol
UA	User Agent
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
UTRAN	UMTS Terrestrial Radio Access Network

Table 2: Acronyms and abbreviations

10

I. Computing Environment

Figure 4 illustrates a generalized example of a suitable computing environment (400) in which the described embodiments may be implemented. The computing environment (400) is not intended to suggest any limitation as to scope

15 of use or functionality of the invention. The present invention may be implemented in diverse general-purpose or special-purpose computing environments such as cellular devices or other user equipment, or GGSN or other network nodes.

With reference to Figure 4, the computing environment (400) includes at least one processing unit (410) and memory (420). In Figure 4, this most basic configuration (430) is included within a dashed line. The processing unit (410) executes computer-executable instructions and may be a real or a virtual
5 processor. In a multi-processing system, multiple processing units execute computer-executable instructions to increase processing power. The memory (420) may be volatile memory (e.g., registers, cache, RAM), non-volatile memory (e.g., ROM, EEPROM, flash memory, etc.), or some combination of the two. The memory (420) stores software (480) implementing the binding mechanism with an
10 authorization token and flow identifier(s).

A computing environment may have additional features. For example, the computing environment (400) includes storage (440), one or more input devices (450), one or more output devices (260), and one or more communication
15 connections (470). An interconnection mechanism (not shown) such as a bus, controller, or network interconnects the components of the computing environment (400). Typically, operating system software (not shown) provides an operating environment for other software executing in the computing environment (400), and coordinates activities of the components of the computing environment (400).

The storage (440) may be removable or non-removable, and includes
20 magnetic disks, magnetic tapes or cassettes, CD-ROMs, CD-RWs, DVDs, or any other medium which can be used to store information and which can be accessed within the computing environment (400). The storage (440) may store computer-executable instructions for the software (480) implementing the binding mechanism with an authorization token and flow identifier(s).

25 The input device(s) (450) may be a touch input device such as a numerical keypad, keyboard, mouse, pen, or trackball, a voice input device, a scanning device, or another device that provides input to the computing environment (400). The output device(s) (460) may be a display, printer, speaker, CD-writer, or another device that provides output from the computing environment (400).

30 The communication connection(s) (470) enable communication over a communication medium to another computing entity. The communication medium conveys information such as computer-executable instructions, audio or video information, or other data in a modulated data signal. A modulated data signal is a signal that has one or more of its characteristics set or changed in such a manner
35 as to encode information in the signal. By way of example, and not limitation,

communication media include wired or wireless media implemented with a radio frequency, electrical, optical, infrared, acoustic, or other carrier.

The invention can be described in the general context of computer-readable media. Computer-readable media are any available media that can be accessed
5 within a computing environment. By way of example, and not limitation, with the computing environment (400), computer-readable media include memory (420), storage (440), communication media, and combinations of any of the above.

The invention can be described in the general context of computer-executable instructions, such as those included in program modules, being
10 executed in a computing environment on a target real or virtual processor. Generally, program modules include routines, programs, libraries, objects, classes, components, data structures, etc. that perform particular tasks or implement particular abstract data types. The functionality of the program modules may be combined or split between program modules as desired in various embodiments.
15 Computer-executable instructions for program modules may be executed within a local or distributed computing environment.

For the sake of presentation, the detailed description uses terms like "request," "generate," and "modify" to describe computer operations in a computing environment. These terms are high-level abstractions for operations performed by
20 a computer, and should not be confused with acts performed by a human being. The actual computer operations corresponding to these terms vary depending on implementation.

II. Binding Mechanism

25 A binding mechanism described herein associates a PDP context bearer with policy information in a GGSN to support SBLP enforcement and QoS interworking. The policy information in the GGSN is based on IP media flows. The binding mechanism identifies the IP media flow(s) associated with a PDP context bearer and uses this identification information in selecting the policy information to
30 apply.

For the binding mechanism, binding information (e.g., an authorization token and flow identifier(s)) provided by a UE is sufficient to identify the IP media flow(s) carried on a PDP context. The binding mechanism provides a simple mechanism that allows for resource authorization and allocation on the basis of IP media flows
35 while retaining a single authorization token in SIP signaling and PDP context

activation/modification messages. This achieves the advantages of using a single per-session authorization token and the advantages of per-flow resource authorization and allocation.

For the policy information, for example, the P-CSCF/PCF uses an SDP
5 description of a session to calculate authorization for the session, including restrictions on IP resources, IP packet flows, and (potentially) IP destinations. An authorized session may include one or more flow authorizations, with each flow authorization containing an IP flow 5-tuple (i.e., source address and port, destination address and port, protocol) for the flow, a specification of authorized
10 resources for the flow, and a DSCP that identifies an assigned DiffServ per hop behavior for the flow.

IP policy enforcement is based on IP media flows, while UMTS bearers are based on PDP contexts from a UE to a GGSN. When a PDP context is activated or modified and SBLP is in effect, the GGSN uses policy information associated with
15 IP media flows to authorize the bearer. The UE controls the mapping of IP media flows to PDP contexts, and the UE provides the GGSN with binding information to allow it to correctly identify the policy information for PDP context activation/modification request messages. Otherwise, the GGSN will not have sufficient information to identify the policy information needed to authorize the
20 bearer.

The IETF SIP Working Group has considered using an authorization token per IP media flow in an SDP description, which could then be provided by the UE to the GGSN as binding information. While architecturally correct, this approach requires changing SDP and sending more information between the PCF, GGSN,
25 and UE.

In contrast, for the binding mechanism described herein, IP media flows are identified by their order in an SDP description. For example, the first media flow (identified by a line beginning with "m=" in the SDP description) is flow 1, the second media flow is flow 2, etc. Since both the P-CSCF/PCF and UE have the
30 SDP description, they will identify flows in a consistent manner. Authorization information from the P-CSCF/PCF and binding information from the UE can both identify the media flow or flows.

Figures 5 and 6 show techniques (500, 600) for a binding mechanism using an authorization token and IP media flow identifier(s). Figures 5 and 6 generally

illustrate the timing for the binding mechanism; the actual timing depends on the underlying protocols (e.g., SIP and PDP), network, etc.

With reference to Figures 5 and 6, during SIP signaling, the P-CSCF/PCF transmits (610) an authorization token and SDP description to the UE. The UE
5 receives (510) the authorization token and SDP description.

The UE then transmits (520) a PDP context request. When activating/modifying a PDP context, the UE includes the authorization token as binding information in the request. To map media flows to PDP contexts correctly, the UE should also include one or more flow identifiers according to the SDP description.
10 (The authorization token was sent (610) by the P-CSCF/PCF to the UE during SIP signaling, and the flow identifiers were derived by the UE according to the sequence of media flows in the SDP.) A flow identifier only needs a small number of bits, so there will be minimal impact on airlink performance. Specifically, binding information is included in PDP Context Activation/Modification messages to
15 associate the PDP context bearer with policy information. The PDP Configuration Options parameter (an optional parameter signalled in a PDP Context Activation/Modification request) is used for this purpose. Alternatively, another parameter is used, such as a Traffic Flow Template parameter of a PDP context.

The authorization token is unique across PDP contexts associated with an
20 APN, and conforms to the IETF specification on SIP Extensions for Media Authorization.

The flow identifiers identify the IP media flows associated with the SIP session. As described above, flow identifiers may be based on the ordering of media flows in the SDP description. In this case, a flow identifier combined with the
25 authorization token is sufficient to uniquely identify an IP media flow, since flow identifiers are interpreted relative to an authorization token.

In order to allow QoS and policy information to be "pulled" from the PCF, the authorization token may also allow the GGSN to determine the address of the PCF to be used.

30 The GGSN receives (620) the PDP context request and processes the PDP context request. For example, the GGSN identifies (630) the IP media flow(s) associated with the PDP context bearer using the included binding information, queries (640) the PCF for the policy information to apply to the IP media flow(s) identified by the binding information, and uses received policy information

associated with the IP media flow(s) to authorize (650) the bearer, if appropriate in view of the policy information.

SIP session modification can result in changes to the SDP description, such as the addition or deletion of media flows. (For example, in one implementation, when a media flow is deleted, the corresponding "m" line is still be in SDP description, which will be set to "m=0". The corresponding authorized QoS resource for this deleted flow is set to zero in the PCF. When a new media flow is added, it is added at the end of the existing SDP description.) The P-CSCF/PCF may issue a new authorization token when the SDP description changes. If the resources associated with a PDP context increase as a result of the SIP session modification, the UE sends a PDP context modification with the old (or new) authorization token and flow identifiers.

Having described and illustrated the principles of my invention with reference to certain described embodiments, it will be recognized that the described embodiments can be modified in arrangement and detail without departing from such principles. It should be understood that the programs, processes, or methods described herein are not related or limited to any particular type of computing environment, unless indicated otherwise. Various types of general purpose or specialized computing environments may be used with or perform operations in accordance with the teachings described herein. Elements of the described embodiments shown in software may be implemented in hardware and vice versa.

In view of the many possible embodiments to which the principles of my invention may be applied, I claim as my invention all such embodiments as may come within the scope and spirit of the following claims and equivalents thereto.

CLAIMS

I claim:

1. In an apparatus, a method of requesting resource authorization comprising:
transmitting one or more PDP context requests including binding information for
5 one or more IP media flows of a session, wherein the binding information includes an
authorization token and one or more IP media flow identifiers.
2. The method of claim 1 wherein the one or more IP media flow identifiers
combine with the authorization token to identify the one or more IP media flows.
10
3. The method of claim 1 wherein the apparatus is user equipment, and
wherein the one or more IP media flow identifiers reference a flow order in a SDP
description that is accessible to the user equipment and a P-CSCF/PCF.
- 15 4. The method of claim 1 wherein each PDP context request is a PDP context
activation request or a PDP context modification request.
5. A computer-readable medium having encoded therein computer-executable
instructions for causing a computer programmed thereby to perform the method of
20 claim 1.
6. In a network node, a method of authorizing resources comprising:
processing binding information for one or more IP media flows of a session,
wherein the binding information includes an authorization token and one or more IP
25 media flow identifiers.
7. The method of claim 6 wherein the one or more IP media flow identifiers
combine with the authorization token to identify the one or more IP media flows.
- 30 8. The method of claim 6 wherein the network node comprises a P-CSCF/PCF,
and wherein the one or more IP media flow identifiers reference a flow order in a SDP
description that is accessible to the P-CSCF/PCF and user equipment.

9. The method of claim 6 wherein the processing comprises authorizing the one or more IP media flows according to a service-based local policy decision.

5 10. A computer-readable medium having encoded therein computer-executable instructions for causing a computer programmed thereby to perform the method of claim 6.

10 11. A computer-readable medium having encoded therein computer-executable instructions for causing user equipment programmed thereby to perform a method of requesting resource authorization and allocation, the method comprising:
receiving a media authorization token; and
transmitting a context activation request including the media authorization token for authorizing each of one or more media flows of a session, wherein the media
15 authorization token in combination with a media flow identifier from among plural media flow identifiers is sufficient to uniquely identify a media flow from among plural media flows of the session.

20 12. The computer-readable medium of claim 11 wherein the plural media flow identifiers reference a flow order in a session description, and wherein a gateway node authorizes the one or more media flows according to a service-based local policy decision.

25 13. The computer-readable medium of claim 11 wherein the method further comprises:
receiving a second media authorization token; and
transmitting a context modification request including the second media authorization token for modifying authorization of the one or more media flows.

30 14. A computer-readable medium having encoded therein computer-executable instructions for causing a network node programmed thereby to perform a method of authorizing and allocating resources, the method comprising:

receiving a context request including a media authorization token for authorizing each of one or more media flows of a session, wherein the media authorization token in combination with a media flow identifier from among plural media flow identifiers is sufficient to uniquely identify a media flow from among plural media flows of the session; and
5 requesting policy information indicated by the media authorization token.

15 15. The computer-readable medium of claim 14 wherein the plural media flow identifiers reference a flow order in a session description.

10 16. The computer-readable medium of claim 14 wherein the method further comprises:
authorizing the one or more media flows according to a service-based local policy decision.

15 17. A computer-readable medium having encoded therein computer-executable instructions for causing user equipment programmed thereby to perform a method of requesting resource authorization and allocation for one or more packet media flows of a session, the method comprising:

20 receiving an authorization token and packet media flow information during session protocol signaling, the packet media flow information accessible to a network node and the user equipment; and

transmitting one or more messages including binding information for authorizing one or more packet media flows of a session, wherein the binding information includes
25 the authorization token, whereby each of one or more packet media flow identifiers is interpreted relative to the authorization token to identify a packet media flow of the session.

30 18. The computer-readable medium of claim 17 wherein the user equipment is a cellular device, wherein the network node comprises a GGSN, and wherein each of the one or more messages is a PDP context activation or modification request.

19. The computer-readable medium of claim 17 wherein the one or more packet media flows are IP media flows.

5 20. The computer-readable medium of claim 17 wherein a SDP description comprises the packet media flow information, and wherein the one or more packet media flow identifiers reference a media order in the SDP description.

10 21. The computer-readable medium of claim 17 wherein the session protocol is SIP, and wherein a PCF of a P-CSCF generates the authorization token.

22. The computer-readable medium of claim 17 wherein the user equipment transmits a single message to request resource authorization and allocation for all packet media flows of the session.

15 23. A computer-readable medium having encoded therein computer-executable instructions for causing a network node programmed thereby to perform a method of authorizing and allocating resources for one or more packet media flows of a session, the method comprising:

20 transmitting an authorization token and packet media flow information during session protocol signaling, the packet media flow information accessible to the network node and user equipment;

25 processing one or more messages including binding information for authorizing one or more packet media flows of a session, wherein the binding information includes the authorization token, and wherein the processing includes interpreting each of one or more packet media flow identifiers relative to the authorization token to identify a packet media flow of the session.

30 24. The computer-readable medium of claim 23 wherein the user equipment is a cellular device, wherein the network node comprises a GGSN, and wherein the one or more packet media flows are IP media flows.

25. The computer-readable medium of claim 23 wherein a SDP description comprises the packet media flow information, and wherein the one or more packet media flow identifiers reference a media order in the SDP description.

5 26. The computer-readable medium of claim 23 wherein the session protocol is SIP, and wherein a PCF of a P-CSCF generates the authorization token.

10 27. The computer-readable medium of claim 23 wherein the network node processes a single message requesting resource authorization and allocation for all packet media flows of the session.

 28. The computer-readable medium of claim 23 wherein the method further comprises:
 requesting policy information indicated by the authorization token.

1/4

Figure 1, prior art


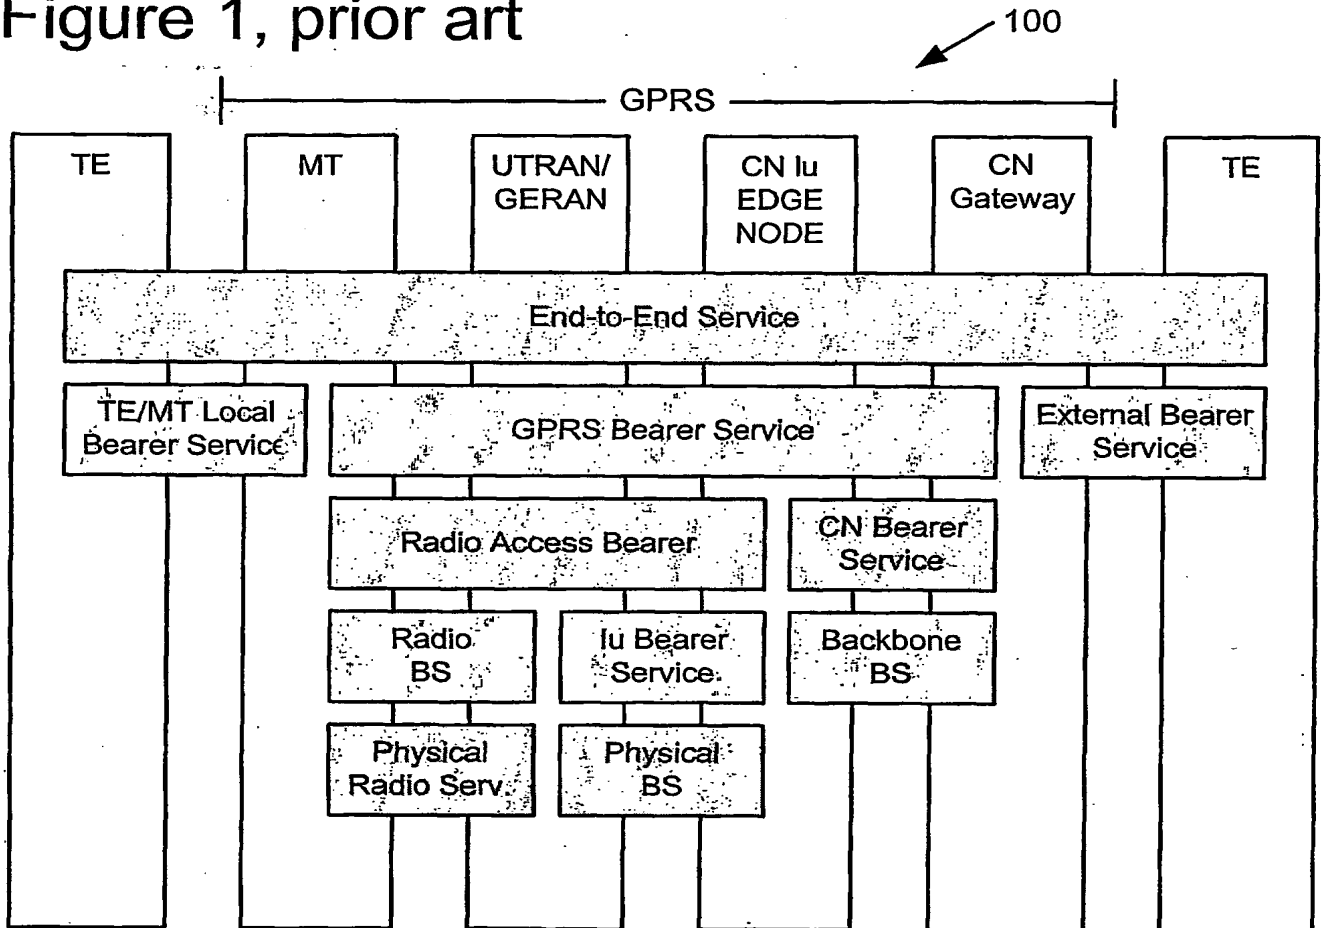


Figure 4

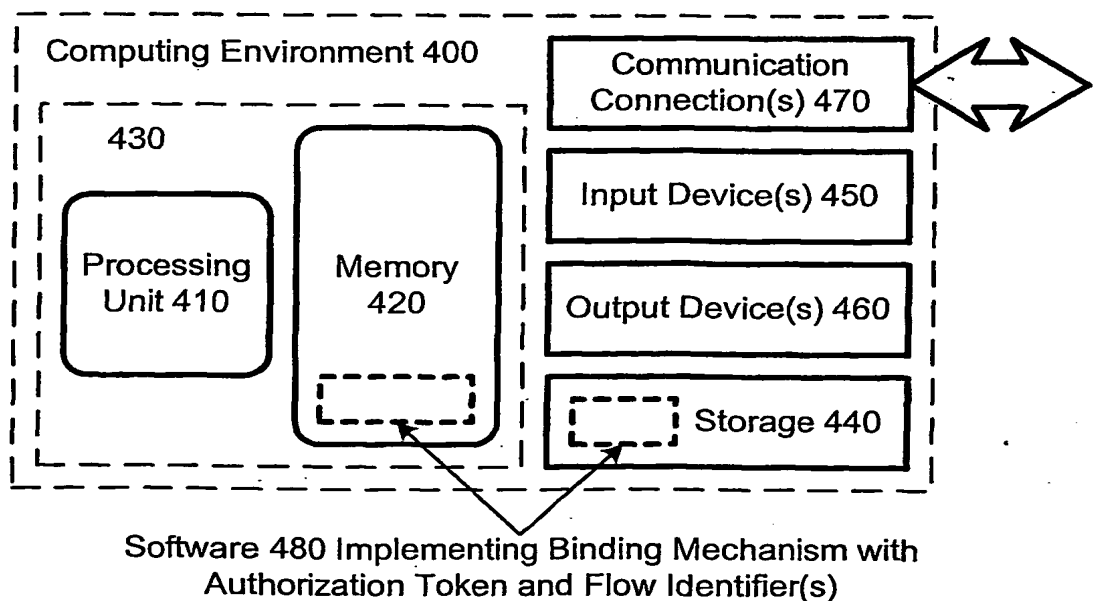

2/4

Figure 2, Prior Art

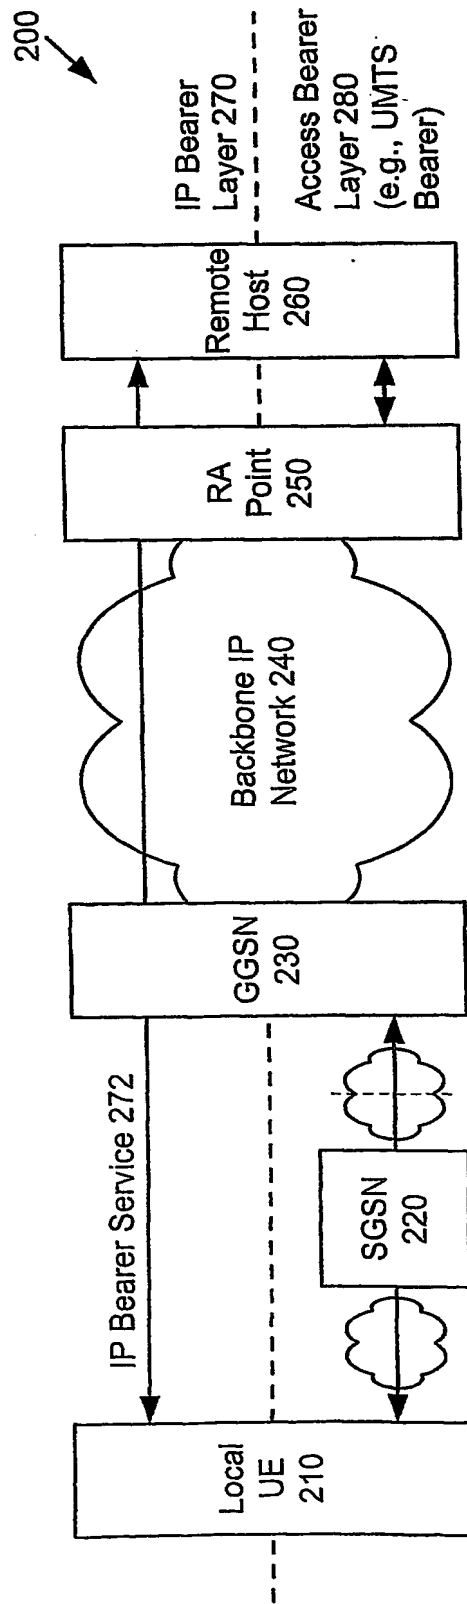


Figure 3, Prior Art

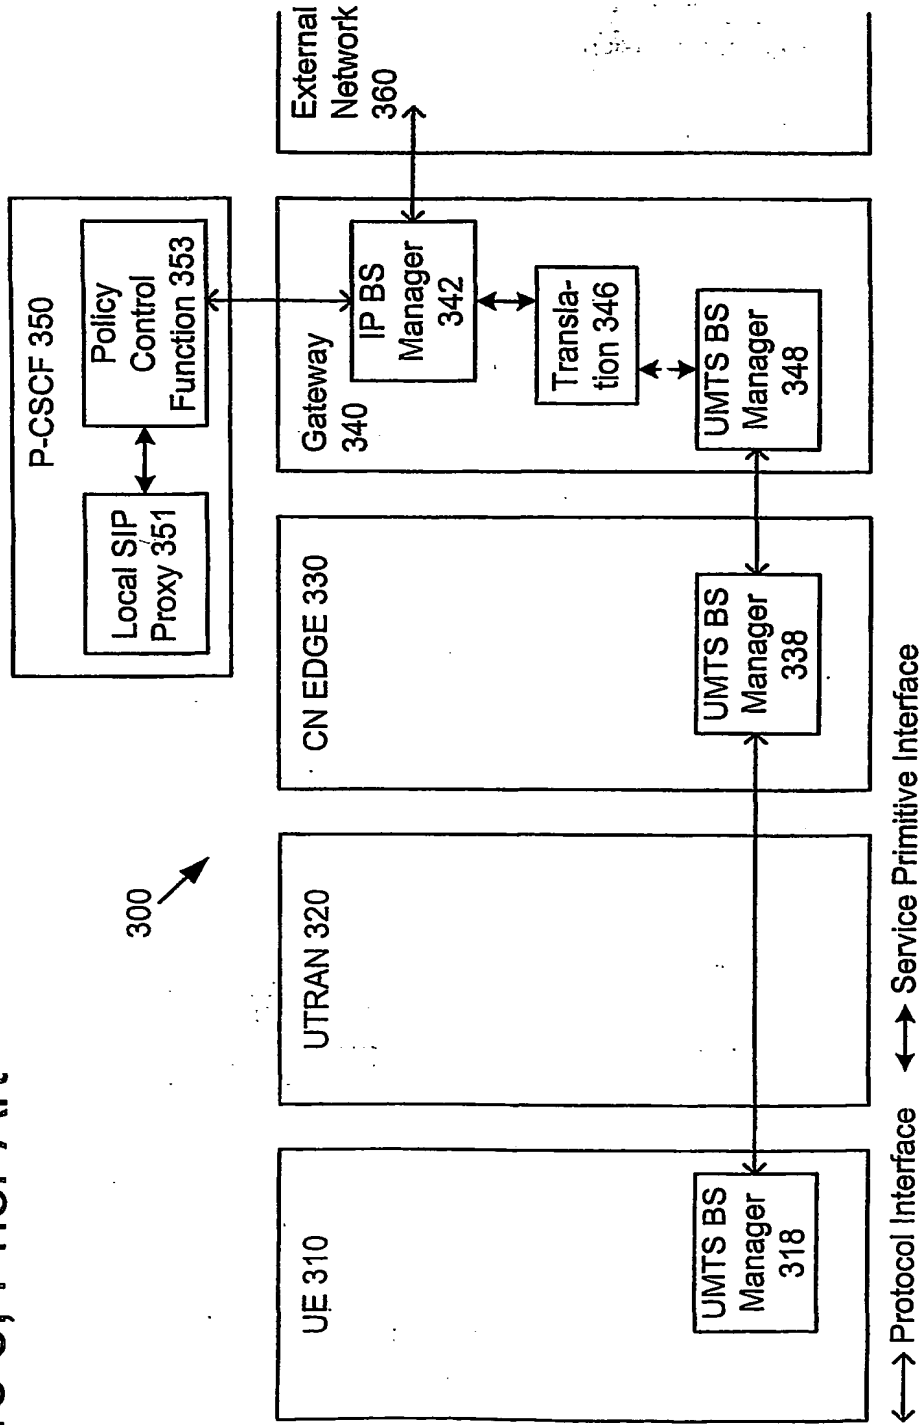


Figure 5

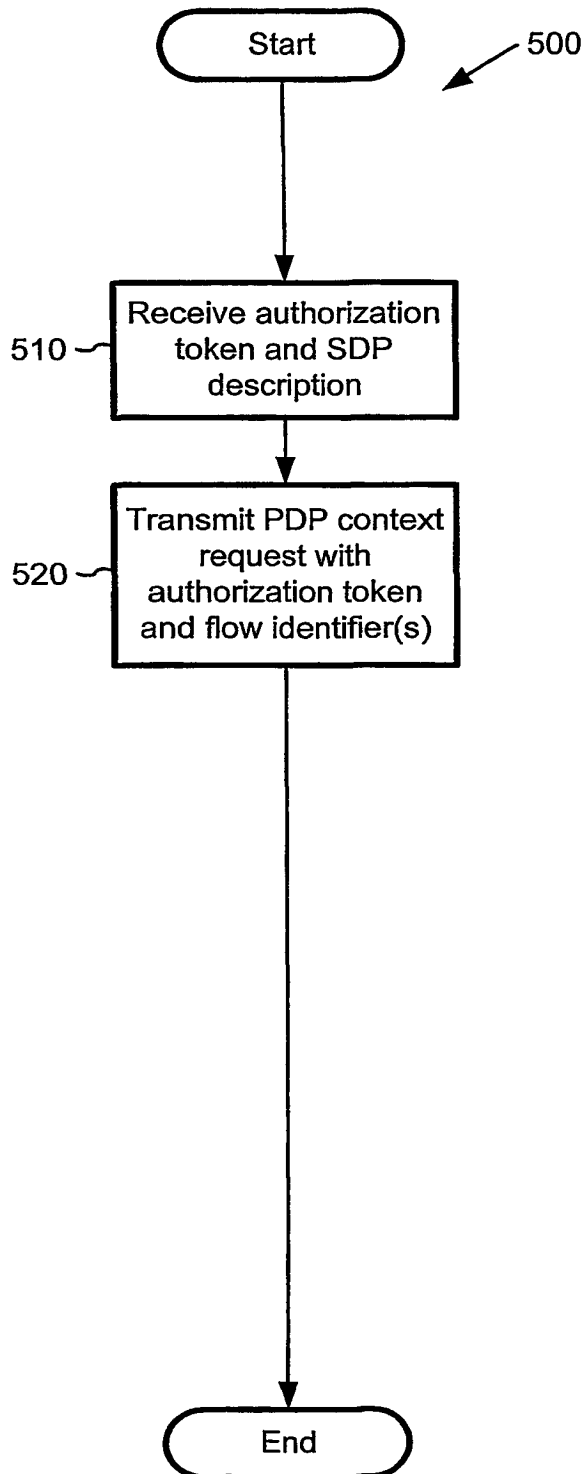


Figure 6

